



Mailing  
Printing

RISO ComColor® GL Series Printers

# Speed-up your high-volume, colour print communications.



## Australia

Level 1, 68 Waterloo Road  
Macquarie Park NSW 2113  
13 23 63  
[pitneybowes.com/au](http://pitneybowes.com/au)

## New Zealand

Building B, Unit 1 & 4  
72 Apollo Drive  
Rosedale  
Auckland 0632  
0800 748 639  
[pitneybowes.com/nz](http://pitneybowes.com/nz)


For more information, call or visit us online.

Pitney Bowes and the Corporate logo, are trademarks of Pitney Bowes Inc.  
or a subsidiary. All other trademarks are the property of their respective owners.  
© 2022 Pitney Bowes Inc. All rights reserved.

# Improve your communications with colour.

**Boost customer engagement.**  
Most of your customer interactions — your website, mobile app and email — are in full colour. Yet, your printed communications continue to lag behind in black and white. Have a more productive conversation with customers with full colour. Use colour to highlight special announcements, call out new features or emphasise relevant offers. Plus, by leveraging the high open-rate of transactional communications, your audience is more likely to respond to offers. Most importantly, colour allows you to give your customers consistent branding and messaging across physical and digital touch-points.

**Colour output with black and white costs.**  
Typical businesses have perceived printing in colour as being too expensive and too slow. It's not any more. Now, you can add the value of colour to your communications without decreasing profitability. The ComColor® GL prints full colour transactional documents faster — and for less. Its inkjet technology adds the engaging colour that your customers want for a similar cost to black and white print without any reduction in rated speeds.

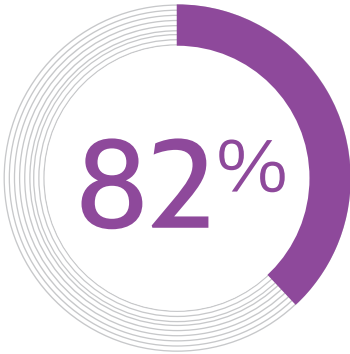


## Improve brand experience & capture attention

Research has found that using colour on printed materials increases the reader's attention span and recollection by 82%. Using colour print can clearly help you stand out from the crowd and improve the customer's experience of your brand<sup>1</sup>.

## Double response

by adding revenue generating cross-sell offers to the statement<sup>2</sup>.

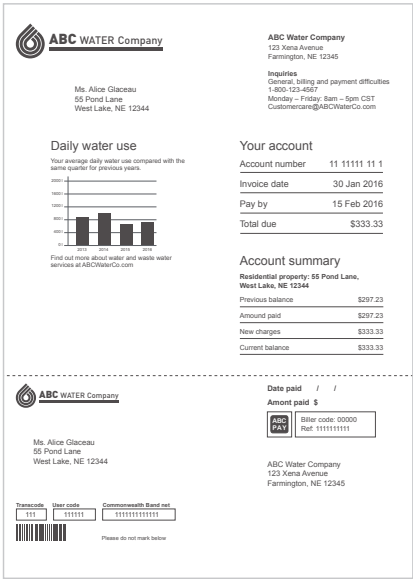

Sample black and white statement



Sample colour statement

# Keep your print and mail moving.


Your business depends on sending engaging transactional documents, like bills and statements, to your customers. Meet your deadlines and accelerate your high-volume printing processes with the RISO ComColor® GL inkjet printer.

**Improving uptime has never been cooler.**  
Older print technologies, like toner-based printers, use heat to print. This creates static and causes paper to curl, causing jams and other maintenance issues that delay your workflow. More time is wasted waiting for printed pages to cool down before using your folding and inserting systems, all of which prevents important communications from reaching customers on time, especially during high-volume print runs.

The RISO ComColor GL prints your documents reliably using heatless inkjet printing, so you can fold and insert your mail without delays. It uses innovative inkjet technology coupled with a simple straight paper path. Paper is printed cold, fast, and flat for continuous operation and maximised uptime in your full print-to-mail process.


## Accelerate your print to mail process

### Traditional laser printing

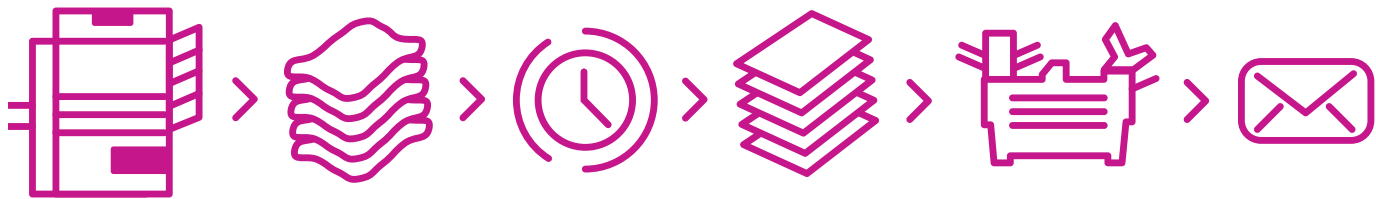

- Traditional laser printer with fuser / toner roller and photoreceptor drum
- Hot curled, static paper
- Cool / dry time
- Cool / flat paper ready for folding / inserting
- Folding / inserting system
- Stuffed envelopes ready to mail

### RISO ComColor GL Series

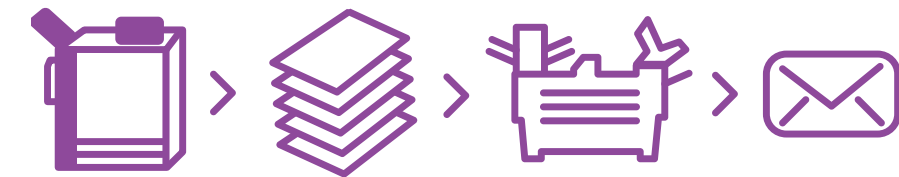

- The RISO ComColor GL inkjet printer solution
- Cool / flat paper ready for folding / inserting
- Folding / inserting system
- Stuffed envelopes ready to mail

## Additional optional accessories to customise your workflow.

The ComColor® GL Series offers flexible options to suit your print finishing and management needs.

### Face Down Finisher G10

Compact finisher exclusively for offset stacking and stapling finished prints.



Face Down Finisher G10

### Scanner HS7000

The auto feeder enables copying and scanning of duplex originals of up to 200 sheets<sup>3</sup> at a time. Output formats include TIFF, PDF, PDF/A for monochrome and TIFF, JPEG, PDF, PDF/A for grayscale/full colour.



Scanner HS7000

### Multifunction Finisher FG20

Intelligent inline functions performed automatically simplify the finishing process.



Multifunction Finisher FG20

### Auto-Control Stacking Tray II

The paper guides automatically open to the correct width to match the paper in use.



Auto-Control Stacking Tray II

### Wide Stacking Tray

Wider paper can be printed and stacked in a wider tray to match the paper in use.



Wide Stacking Tray

### Additional Stacker Cart

Cart that allows printer to continue printing while the other cart(s) are in use at the inserter area<sup>4</sup>.



Stacker Cart

# Maximise productivity.

The ComColor® GL series can be configured with optional production accessories that bring new efficiencies to high-volume printing with reliable performance day in and day out.



### FS2100C Fiery® RIP

Produce complex personalized products such as direct mailings, newsletters, statements, and more — always at full speed and from all major variable data formats, and easily generate VDP jobs with the free Fiery FreeFrom Create application. Optimize processing time and maintain the highest print quality by analyzing incoming PDF files and dynamically choosing optimal print settings with Fiery JobExpert™.



### High Capacity Feeder

Achieve a higher volume of prints without replenishing paper with the optional High Capacity Feeder, built to hold up to 4,000 sheets. Print jobs more efficiently with fewer interruptions, optimising your time.



### High Capacity Stacker

After your jobs have printed, the optional High Capacity Stacker allows the stacking of larger output volumes with reduced user intervention. Convenient removal and transport of the printed output is possible using the optional High Capacity Stacker Cart.

# RISO ComColor® GL Specifications



	GL7430	GL9730
Print speed <sup>1</sup>	Simplex: Up to 140 ppm Duplex: Up to 70 sheets/min (140 pp)	Simplex: Up to 165 ppm Duplex: Up to 82 sheets/min (164 pp)
Sheet capacity	2,500 sheets (1000 Standard Tray, 500 sheet drawer x 3)	2,500 sheets (1000 Standard Tray, 500 sheet drawer x 3)
Print resolution (standard)	Black: 600 x 600 dpi, CMYG: 300 x 600 dpi (Fine)	Black: 600 x 600 dpi, CMYG: 300 x 600 dpi (Fine)
Print area	314 mm x 548 mm	314 mm x 548 mm
Paper weight (standard tray)	Standard Tray: 46 gsm to 210 gsm	Standard Tray: 46 gsm to 210 gsm
Ink	Oil-based pigment ink (Cyan, Magenta, Yellow, Black, Gray)	Oil-based pigment ink (Cyan, Magenta, Yellow, Black, Gray)
Print technology	Line-type inkjet system	Line-type inkjet system
Dimensions (W x D x H)	In use: 1,220 mm x 725 mm x 1,160 mm With cover and tray closed: 1,160 mm x 705 mm x 1,015 mm	In use: 1,220 mm x 725 mm x 1,160 mm With cover and tray closed: 1,160 mm x 705 mm x 1,015 mm
Power source	AC 100 V - 240 V, 12.0 A - 6.0 A, 50 Hz - 60 Hz	AC 100 V - 240 V, 12.0 A - 6.0 A, 50 Hz - 60 Hz

# FS2100C Fiery® RIP Specifications



FS2100C, an EFI™ Fiery® server for the RISO ComColor® GL series, helps improve the operation and the management of print jobs, files and media. The Fiery Command WorkStation® is an intuitive way for users to manage all Fiery® Driven™ printers locally or remotely.

CPU	Intel® i3-8100, 4 core processor
Memory capacity	8 GB
Hard disk capacity	Boot Drive 256 GB SSD/Data Drive 500 GB HDD
Operating system	Microsoft® Windows® 10 IoT Enterprise 2019 LTSC
Network interface	2 ports (Ethernet: 10BASE-T/100BASE-TX/1000BASE-T)
Power source	AC100 V - 240V, 1.5A - 1.0 A, 50Hz - 60Hz
Power consumption	Max. 80W / Ready 30W
Dimensions <sup>6</sup> (W x D x H)	204 mm x 248 mm x 384 mm
Weight	Appx. 6 kg
PDL (Page description language)	PostScript® 3 (CPSI:3020), PDF (1.3, 1.4, 1.5, 1.6, 1.7, 2.0), PDF/VT, EPS, FreeForm, FreeForm2, Enhanced PCL6/PCL5, TIFF6.0, PPML3.0, Creo VPS, Fiery JDF1.8
Support protocol	TCP/IP, AppleTalk, Bonjour, LPR, IPP, Port 9100, FTP, SMB, Email (IMAP/POP3), PAP, WSD, USB, HTTP, HTTPs (TLS), SNMP, LDAPv3, IPv4, IPv6, IPSec
Installed font	PS: 140 fonts PCL: 81 fonts
Supported client operating system	Printer Driver: Windows 8.1 (32-bit/64-bit), Windows 10 (32-bit/64-bit), Windows Server® 2012, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019, macOS v10.14 (Mojave), v10.15 (Catalina), v11 (Big Sur) Command WorkStation® : Windows 10 (64-bit), Windows Server 2016 (64-bit), Windows Server 2019 (64-bit), macOS v10.14 (Mojave), v10.15 (Catalina), v11 (Big Sur)

<sup>1</sup> 20 Ways to Share Color Knowledge  
<sup>2</sup> Pitney Bowes Client Success Measure  
<sup>3</sup> 80 gsm or less; Height up to 25 mm  
<sup>4</sup> Must be a cart inside of the stacker for it to run.  
<sup>5</sup> When using either A4 long-edge or letter long-edge feed plain paper and recycled paper 85gsm, and standard density setting. Print measurement pattern [colour measurement sample 2 (JEITA standard pattern J6)]  
<sup>6</sup> Keep other objects at least 200 mm away from the equipment in the rear, and right and left.